



Digital Signage Kiosk

43" | 55"

Digital Signage Kiosk

Infrared Touchscreen

Features

- Boasts Infrared 10-point Touch for versatile interaction, supporting gestures like Flick, Pinch, and Swipe.
- Features a built-in Windows PC with customizable CPU, RAM, and SSD options for tailored performance.
- Functions as a large-scale Tablet or Interactive Kiosk, enhancing sales and brand image effectively.
- Equipped with built-in wireless WIFI & Bluetooth, facilitating standalone touchscreen functionality.
- Offers a Full HD Definition Monitor with durable Tempered Glass for crystal-clear visuals.
- Ensures uninterrupted advertising with loop play capability 24/7.
- Supports remote control and GSM connectivity, with optional digital signage software for added versatility.
- Includes an integrated USB Multimedia Player for seamless media playback.
- Widely deployed across various settings like shopping malls, exhibitions, airports, hospitals, etc., for advertising and self-service kiosk usage.
- Accredited with high-quality certifications such as CB, CE-LVD, CE-EMC, FCC, and RoHS.






Customised Logo

Support Wheels

- 1.Support Split Screen
- 2.Customisation
- 3.Intelligent Speech
- 4.Loop Play
- 5.Remote Control
- 6.4K Display (Optional)

Advanced Split-screen Functionality.

Flexible Display of Photos and Videos

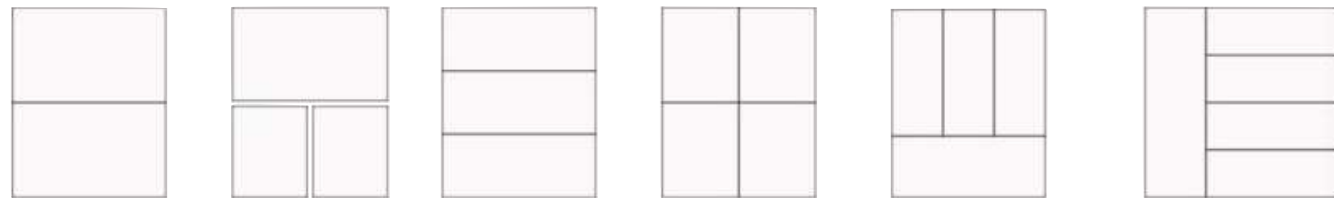

HD Display
(Optional)



Product Details



Applications



Shopping Guide



Catering



Cinemas



Bookstore Inquiry



Medical Promotion



Commercial Advertising



Digital Signage Kiosk

43" | 55"

TPS-20-43

Specifications



Specifications

Overview	Brand	Flexi
	Size	43 inch
	Body Material	SPCC Metal case body + Aluminum Frame
	Color	Black color
	Front surface	Tempered glass
	Life(hrs)	>60,000(hrs)
	Installation	Stand alone
Dimension	Outline Dimension	578.2* 1783* 400mm
	Visual Size	529.4(H)* 941.2(V)mm
	Net Weight	43KG
Display	Panel type	A+ TFT-LCD Module
	Backlight	LED backlight
	Resolution	1920*1080
	Screen ratio	9:16
	Display color	16.7M
	Pixel Pitch(mm)	0.530(H)×0.530 (V)
	Brightness (nits)	350cd/m2
	Contrast	5000:1
	Visual angle	H ±178° / V ±178°

Specifications

PC Configuration	Main chipset	Intel
	CPU	Inter core i3 / i5 / i7
	Memory	4g / 8g / 16g RAM
	Storage	128g / 256g / 512g SSD
	O/S	Windows 10
	Graphics card	Intel HD Integrated Graphics
	Wifi	wireless 2.4G band, 802.11b/g/n
	Bluetooth	Support
	Sound card	Integrated
	Network card	RJ45 10/100/1000M adaptive
	Speaker	2x5W
	OSD display (Menu language)	Multilanguage pack

Interfaces	USB 2.0	*2
	LAN Port	*1
	Wifi antenna	*1
	AC Power	*1
	Switch Button	*1

Specifications

Touch Screen	Touch Type	Infrared 10 points touch
	Touch resolution	4096*4096
	Input Method	Finger, touch pen
	Response time	≤25ms
	Touch identification area	Φ5mm
	Writing screen media	3 mm tempered high transparent anti-glare glass
	Hardness of the Temper glass	Mohs 7
	Touch Durability	≥60 million times
	Communication mode	USB

Power& Temperature	Power supply	AC100~240V 50 /60 HZ
	Rated power (max)	≤110W
	Working temperature	0°C ~ 50°C
	Storage temperature	-20°C~60°C
	Working humidity	10%~90%
	Storage humidity	20%~85%

Certification	CB, CE-EMC, CE-LVD, FCC, RoHS etc
----------------------	-----------------------------------



Digital Signage Kiosk

43" | 55"

TPS-20-55

Specifications



Specifications

Overview	Brand	Flexi
	Size	55 inch
	Body Material	SPCC Metal case body + Aluminum Frame
	Color	Black color
	Front surface	Tempered glass
	Life(hrs)	>60,000(hrs)
	Installation	Stand alone
Dimension	Outline Dimension	733.4* 1876* 450mm
	Visual Size	680.4(H)* 1209.6(V)mm
	Net Weight	60KG
Display	Panel type	A+ TFT-LCD Module
	Backlight	LED backlight
	Resolution	1920*1080
	Screen ratio	9:16
	Display color	16.7M
	Pixel Pitch(mm)	0.530(H)×0.530 (V)
	Brightness (nits)	350cd/m2
	Contrast	5000:1
	Visual angle	H ±178° / V ±178°

Specifications

PC Configuration	Main chipset	Intel
	CPU	Inter core i3 / i5 / i7
	Memory	4g / 8g / 16g RAM
	Storage	128g / 256g / 512g SSD
	o/s	Windows 10
	Graphics card	Intel HD Integrated Graphics
	Wifi	wireless 2.4G band, 802.11b/g/n
	Bluetooth	Support
	Sound card	Integrated
	Network card	RJ45 10/100/1000M adaptive
	Speaker	2x5W
	OSD display (Menu language)	Multilanguage pack

Interfaces	USB 2.0	*2
	LAN Port	*1
	Wifi antenna	*1
	AC Power	*1
	Switch Buttom	*1

Specifications

Touch Screen	Touch Type	Infrared 10 points touch
	Touch resolution	4096*4096
	Input Method	Finger, touch pen
	Response time	≤25ms
	Touch identification area	Φ5mm
	Writing screen media	3 mm tempered high transparent anti-glare glass
	Hardness of the Temper glass	Mohs 7
	Touch Durability	≥60 million times
	Communication mode	USB
Power& Temperature	Power supply	AC100~240V 50 /60 HZ
	Rated power (max)	≤140W
	Working temperature	0°C ~ 50°C
	Storage temperature	-20°C~60°C
	Working humidity	10%~90%
	Storage humidity	20%~85%
Certification	CB, CE-EMC, CE-LVD, FCC, RoHS etc	